


SIGALUX B35 4086

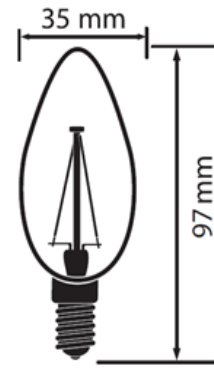

Product reference	Product number	Voltage (V)	Power (W)	Power factor	Lumen (Lm)	Intensity (Cd)	Beam angle (°)	CCT (K)	Socket	Dim or not	Diameter (mm)	Length (mm)	Lifetime (h)	Switch cycles	Energy class
B35	4086	220-240	2.1	0.4	250	/	/	2700	E14	not	97	35	15000	30000	A++

Product Features


- IEC standard size
- Compatible with existing fixtures
- Free of mercury
- ERP compliance
- warm-up time to 60% Φ : <1s
- Starting time: <0.5s
- Color consistency: < 6 step
- Color rendering index: ≥ 80
- Lumen maintenance factor at the end of the nominal life: 70%

Product Benefits


- Warm white 2700K
- Available in E14 base
- Ideal for decorative applications

Product Applications

- NON-Directional light sources
- Ship windows
- Retail outlets
- Maybe used outdoors only in outdoor fixtures
- Working temperature: $-15 \sim +40^{\circ}\text{C}$

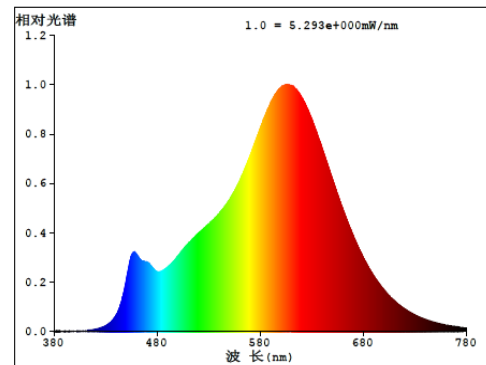

SIGALUX B35 4087

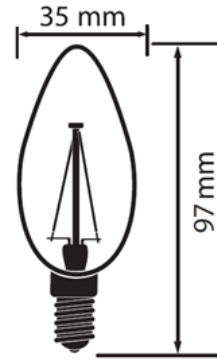

Product reference	Product number	Voltage (V)	Power (W)	Power factor	Lumen (Lm)	Intensity (Cd)	Beam angle (°)	CCT (K)	Socket	Dim or not	Diameter (mm)	Length (mm)	Lifetime (h)	Switch cycles	Energy class
B35	4087	220-240	3.1	0,4	350	/	/	2700	E14	not	97	35	15000	30000	A++

Product Features

- IEC standard size
- Compatible with existing fixtures
- Free of mercury
- ERP compliance
- warm-up time to 60% Φ : <1s
- Starting time: <0.5s
- Color consistency: < 6 step
- Color rendering index: ≥ 80
- Lumen maintenance factor at the end of the nominal life: 70%

Product Benefits

- Warm white 2700K
- Available in E14 base
- Ideal for decorative applications

Product Applications

- NON-Directional light sources
- Ship windows
- Retail outlets
- Maybe used outdoors only in outdoor fixtures
- Working temperature: $-15 \sim +40^{\circ}\text{C}$

