


## SIGALUX Eco A55 28W/42W

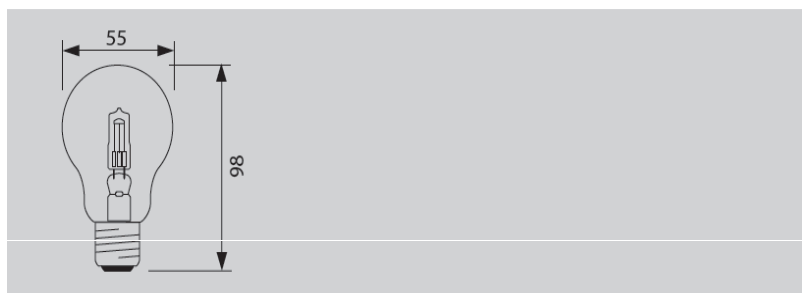

| Product reference | Product number | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|----------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| A55-18-E27        | 4050497 0026   | 220-240     | 18        | 0.95         | 370        | /              | 2750    | E27    | yes        | 55            | 98          | 2000         | 8000          | D            | 36W         |
| A55-28-E27        | 4050497 0027   | 220-240     | 28        | 0.95         | 625        | /              | 2800    | E27    | yes        | 55            | 98          | 2000         | 8000          | D            | 54W         |

### Product Features

- energy level: D
- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 85\%$


### Product Benefits

- Warm light and  $Ra > 98$
- Available in E27 base
- Ecodesign and placement of 36W/54W standard halogen lamps

### Product Applications

- Hotel
- Home
- Restaurant

## SIGALUX Eco B35 18W/28W/42W

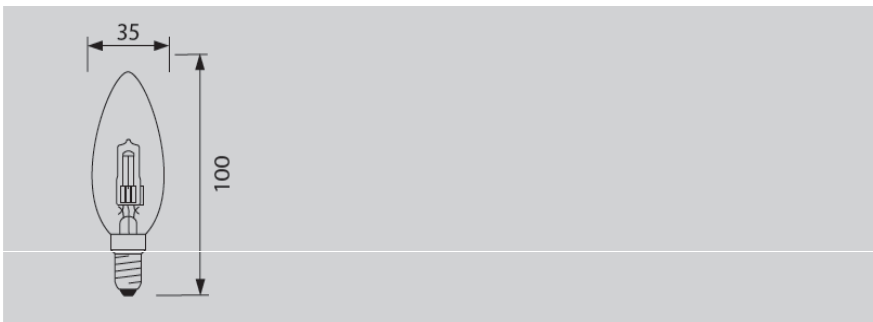

| Product reference | Product number      | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|---------------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| B35-18-           | 4050497 <b>0028</b> | 220-240     | 18        | 0.95         | 205        | /              | 2700    | E14    | yes        | 35            | 100         | 2000         | 8000          | D            | 23W         |
| B35-28-           | 4050497 <b>0029</b> | 220-240     | 28        | 0.95         | 370        | /              | 2750    | E14    | yes        | 35            | 100         | 2000         | 8000          | D            | 36W         |
| B35-42-           | 4050497 <b>0654</b> | 220-240     | 42        | 0.95         | 625        | /              | 2800    | E14    | yes        | 35            | 100         | 2000         | 8000          | D            | 54W         |

### Product Features

- energy level: D
- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 85\%$


### Product Applications

- Hotel
- Home
- Restaurant

### Product Benefits

- Warm light and  $Ra > 98$
- Available in E14 base
- Ecodesign and placement of 23W/36W/54W standard halogen lamps

## SIGALUX Eco P45 28W

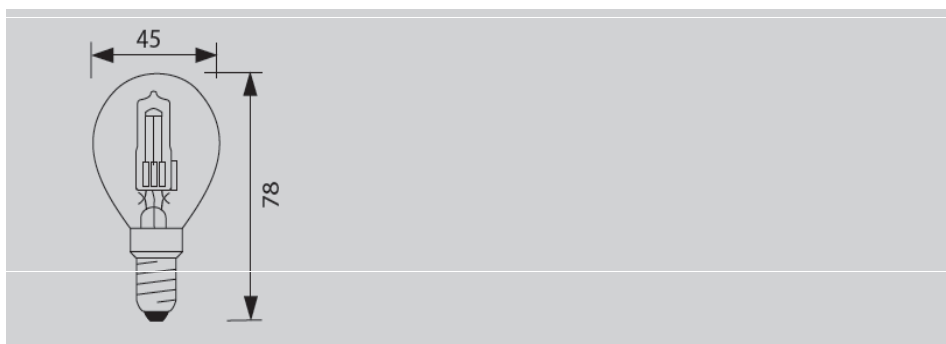

| Product reference | Product number      | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|---------------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| P45-28-           | 4050497 <b>0036</b> | 220-240     | 28        | 0.95         | 370        | /              | 2750    | E14    | yes        | 45            | 78          | 2000         | 8000          | D            | 36W         |

### Product Features

- energy level: D
- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 85\%$


### Product Applications

- Hotel
- Home
- Restaurant

### Product Benefits

- Warm light and  $Ra > 98$
- Available in E14 base
- Ecodesign and placement of 36W standard halogen lamps

## SIGALUX MR16 35W



| Product reference | Product number | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|----------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| MR16-35-GU5.3     | 4050497 0603   | 12          | 35        | 0.9          | 315        | 700            | 2900    | GU5.3  | yes        | 50            | 45          | 2000         | 8000          | C            | /           |

### Product Features

- energy level: C
- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 80\%$


### Product Benefits

- Warm light and  $Ra > 98$
- Available in GU5.3 base

### Product Applications

- Hotel
- Home
- Restaurant

## SIGALUX GU10 35W/50W



| Product reference | Product number      | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|---------------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| GU10-35-          | 4050497 <b>0600</b> | 220-240     | 35        | 0.9          | 190        | 450            | 2650    | GU10   | yes        | 50            | 54          | 2000         | 8000          | D            | /           |
| GU10-50-          | 4050497 <b>0601</b> | 220-240     | 50        | 0.9          | 285        | 600            | 2750    | GU10   | yes        | 50            | 54          | 2000         | 8000          | D            | /           |

### Product Features

- energy level: D
- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 80\%$


### Product Applications

- Hotel
- Home
- Restaurant

### Product Benefits

- Warm light and  $Ra > 98$
- Available in GU10 base

## SIGALUX Eco G9 28W



| Product reference | Product number      | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|---------------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| G9-28-G9          | 4050497 <b>0639</b> | 220-240     | 28        | 0.95         | 370        | /              | 2750    | G9     | yes        | 13.2          | 41          | 2000         | 8000          | D            | 36w         |

### Product Features

- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 85\%$


### Product Applications

- Hotel
- Home
- Restaurant

### Product Benefits

- Warm light and  $Ra > 98$
- Available in G9 base

## SIGALUX Eco G9 28W

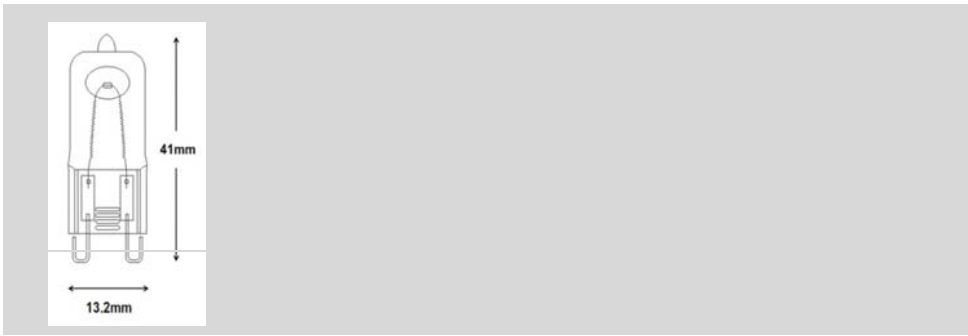

| Product reference | Product number | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|----------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| G9-28-G9          | 4050497 0657   | 220-240     | 28        | 0.95         | 370        | /              | 2750    | G9     | yes        | 13.2          | 41          | 2000         | 8000          | D            | 36w         |

### Product Features

- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 85\%$


### Product Applications

- Hotel
- Home
- Restaurant

### Product Benefits

- Warm light and  $Ra > 98$
- Available in G9 base

## SIGALUX Eco G4 20W



| Product reference | Product number      | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|---------------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| G4-20-G4          | 4050497 <b>0610</b> | 12          | 20        | 0.95         | 255        | /              | 2750    | G4     | yes        | 8             | 31          | 2000         | 8000          | C            | 27w         |

### Product Features

- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 85\%$

### Product Applications

- Hotel
- Home
- Restaurant

### Product Benefits

- Warm light and  $Ra > 98$
- Available in G4 base



## SIGALUX Eco R50 28W/42W



| Product reference | Product number      | Voltage (V) | Power (W) | Power factor | Lumen (Lm) | Intensity (Cd) | CCT (K) | Socket | Dim or not | Diameter (mm) | Length (mm) | Lifetime (h) | Switch cycles | Energy class | Equivalence |
|-------------------|---------------------|-------------|-----------|--------------|------------|----------------|---------|--------|------------|---------------|-------------|--------------|---------------|--------------|-------------|
| R50-28-E14        | 4050497 <b>0305</b> | 220-240     | 28        | 0.9          | 250        | 300            | 2750    | E14    | yes        | 50            | 85          | 2000         | 8000          | D            | 36W         |
| R50-42-E14        | 4050497 <b>0306</b> | 220-240     | 42        | 0.9          | 225        | 600            | 2750    | E14    | yes        | 50            | 85          | 2000         | 8000          | D            | 50W         |

### Product Features

- energy level: D
- lifetime: 2000h
- ERP compliance
- warm-up time to 60%  $\Phi$ :  $\leq 1s$
- Starting time:  $< 0.2s$
- Lumen maintenance factor at 75% of rated average lifetime:  $\geq 80\%$

### Product Benefits

- Warm light and  $Ra > 98$
- Available in E14 base
- Ecodesign and placement of 36W/50W standard halogen lamps

### Product Applications

- Hotel
- Home
- Restaurant